


1. Machined surfaces  $\perp$  .001 in 12"  $\parallel$  .002 in 12"  $\square$  .001 in 12"
2. Deburr and break all sharp edges.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ABBOTT WORKHOLDING PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ABBOTT WORKHOLDING PRODUCTS IS PROHIBITED.

**Includes D820TP Top Plate And (2) Lifting Rings Installed**

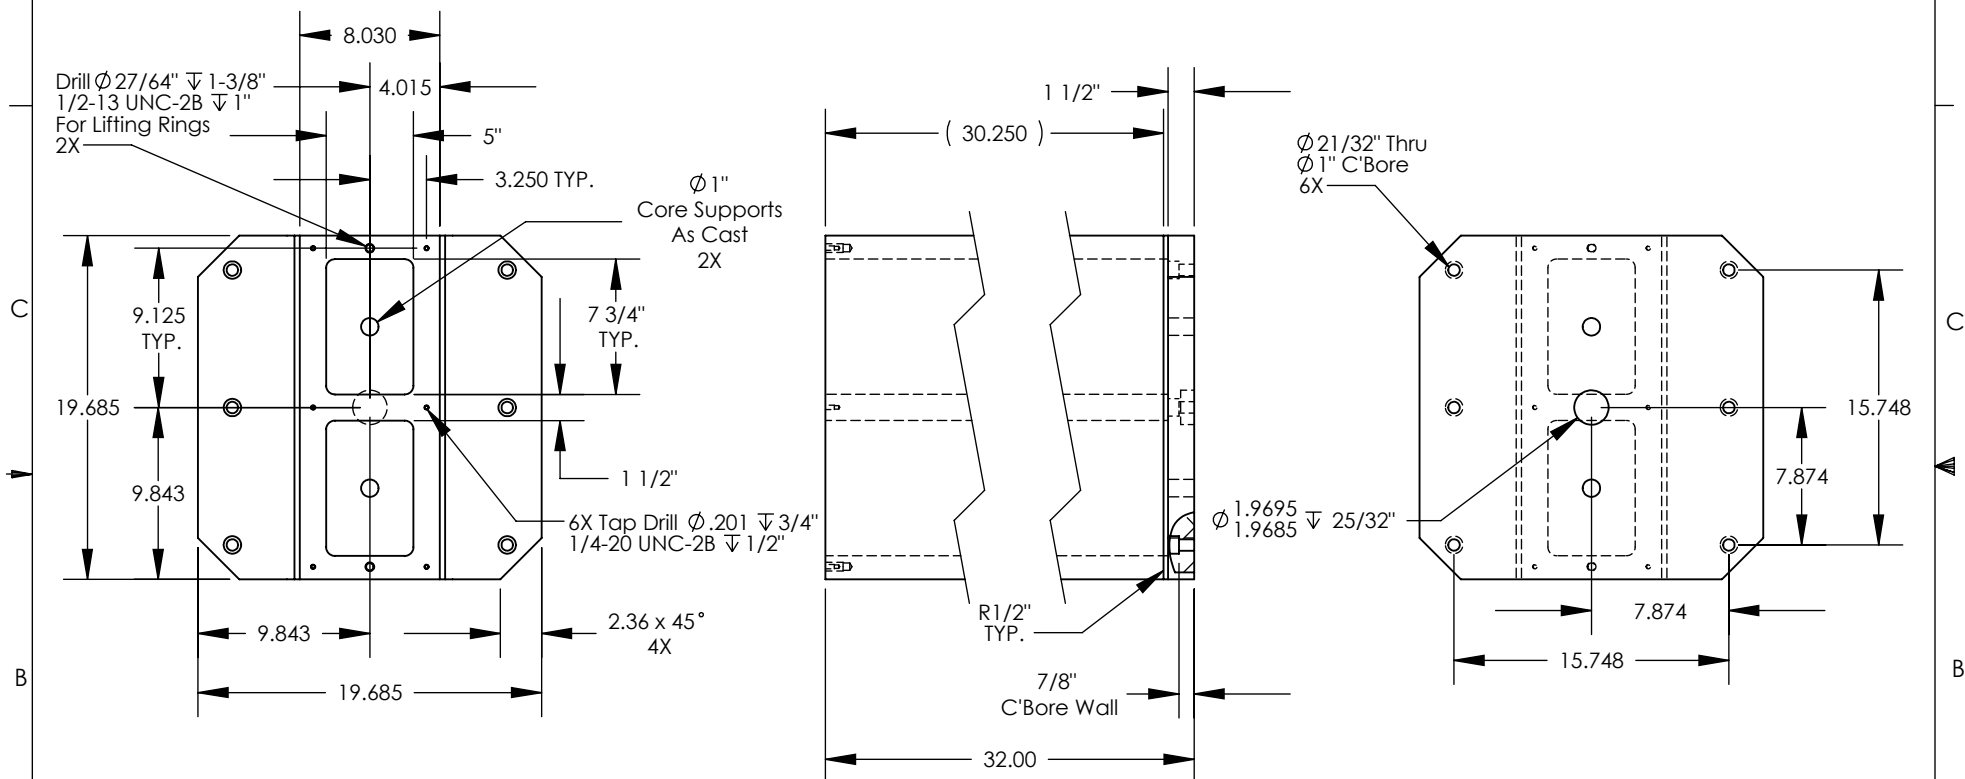

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
$\pm 1/32$	$.XX \pm .015$	$\pm 5^\circ$
	$.XXX \pm .005$	
	$.XXXX \pm .0005$	

DRAWN ZGG	DATE 05/21/20
MATERIAL 713	WEIGHT(POUNDS) 309
STYLE TC	DISPOSITION Release

## Abbott Workholding Products

430 McCall Road  
Manhattan, KS 66502

785-776-8555  
785-587-0004 Fax

800-528-6459

www.abbottworkholding.com  
engineering@abbottworkholding.com

CUSTOMER:  
d Stock

SIZE	Part Name
------	-----------

A	D82032-500DIN
---	---------------

REV.	
------	--

—