


1. Machined surfaces $\perp .001$ in 12" $\parallel .002$ in 12" $\square .001$ in 12"
2. Deburr and break all sharp edges.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ABBOTT WORKHOLDING PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ABBOTT WORKHOLDING PRODUCTS IS PROHIBITED.

Includes D825TP Top Plate And (2) Lifting Rings Installed

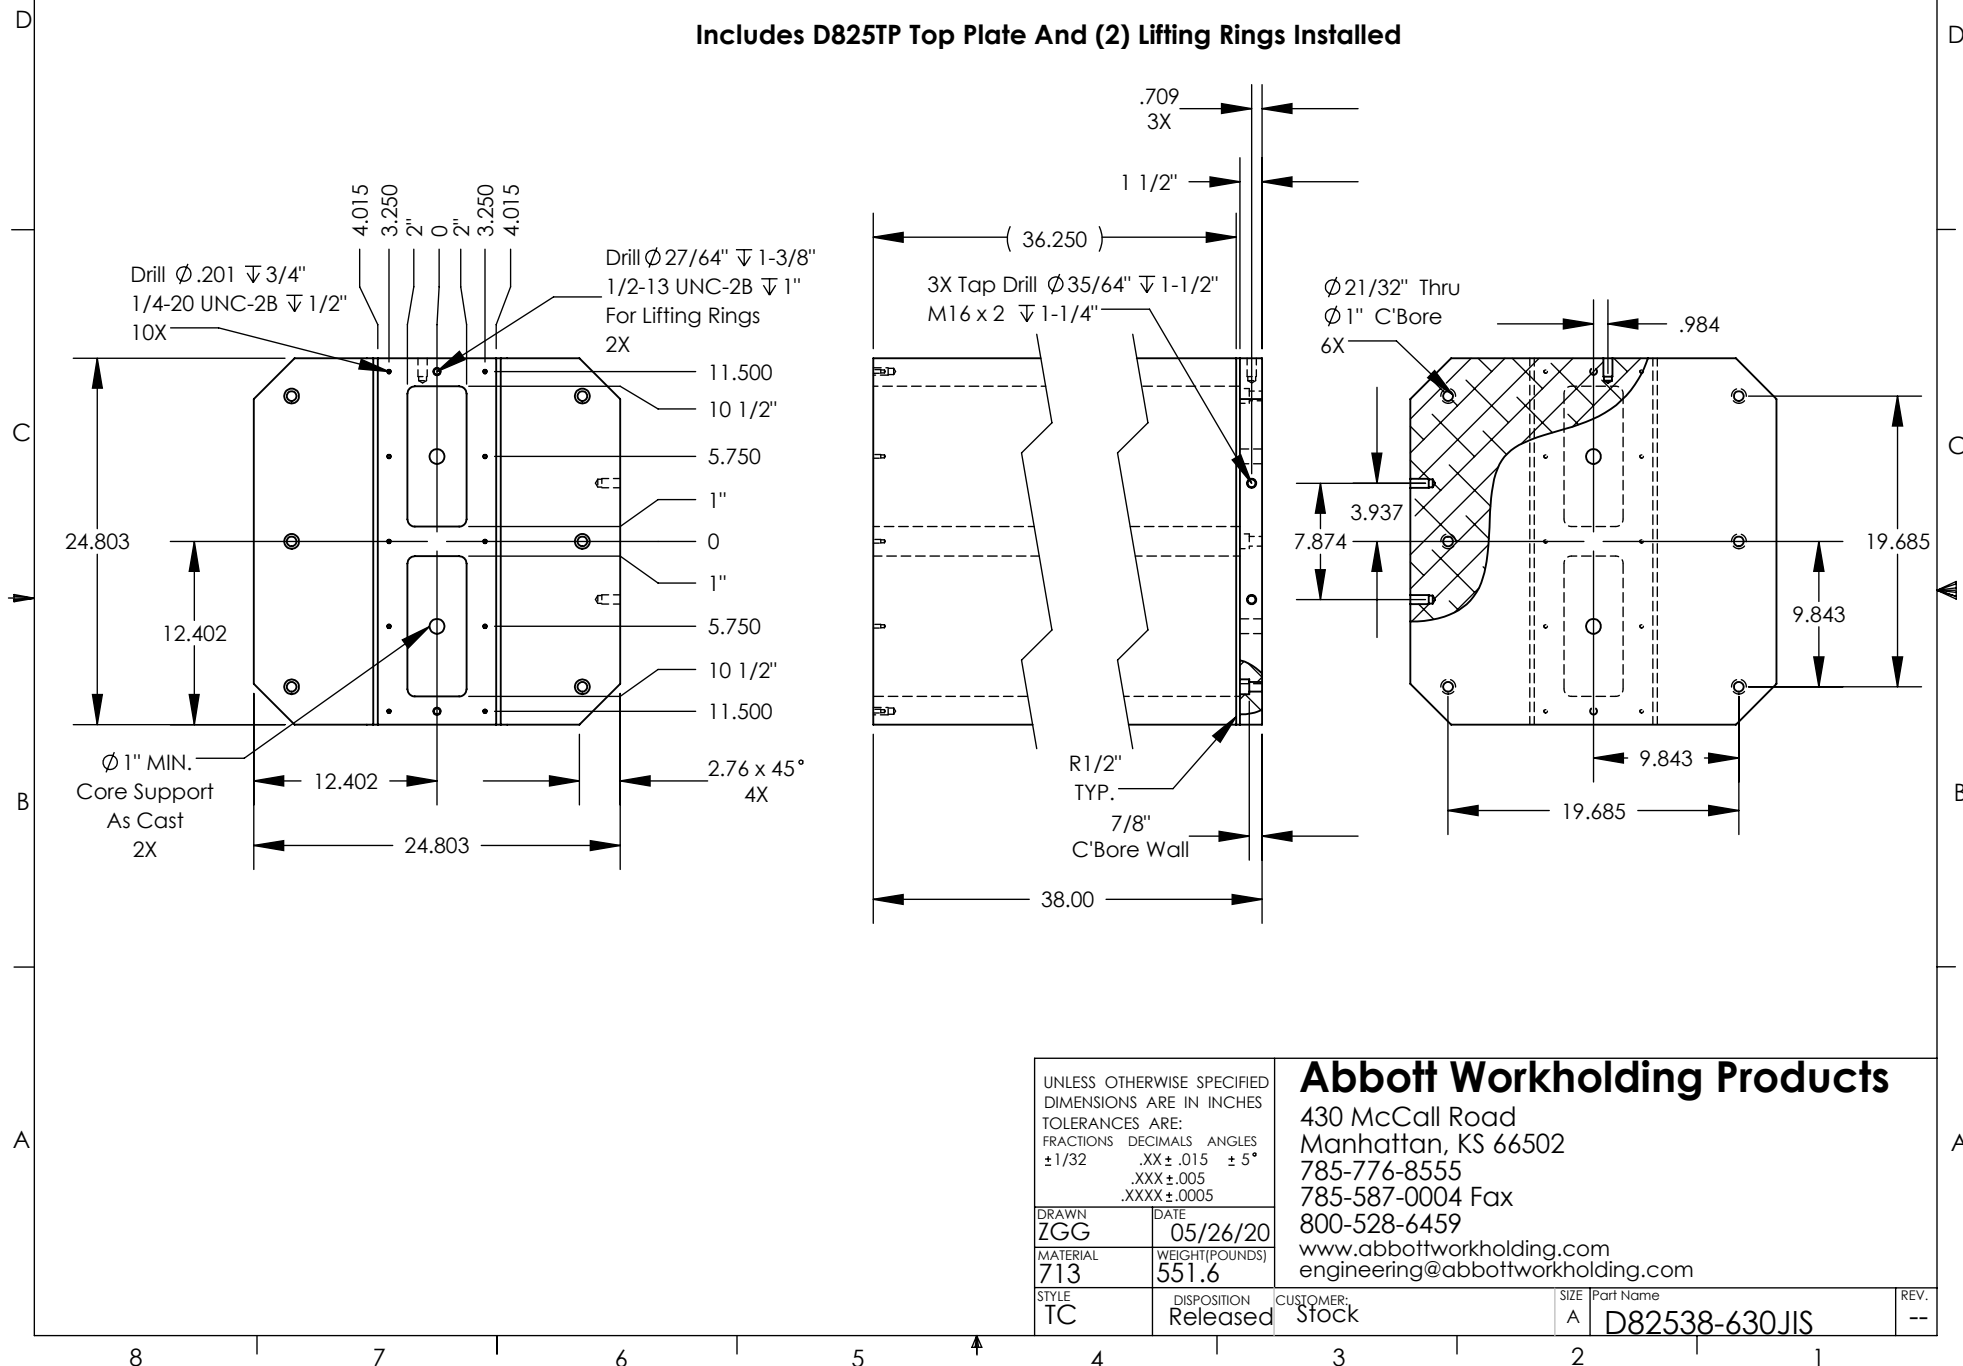

Abbott Workholding Products

430 McCall Road
Manhattan, KS 66502

785-776-8555
785-587-0004 Fax

800-528-6459

www.abbottworkholding.com
engineering@abbottworkholding.com

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
$\pm 1/32$	$.XX \pm .015$	$\pm 5^\circ$
	$.XXX \pm .005$	
	$.XXXX \pm .0005$	

DRAWN ZGG	DATE 05/26/20
--------------	------------------

MATERIAL	WEIGHT(POUNDS)
713	551.6

STYLE TC	DISPOSITION Released
-------------	-------------------------

CUSTOMER:
Stock

SIZE	Part Name
A	D82538-630JIS

REV
