


NOTES: Unless otherwise specified.

1. Machined surfaces  $\perp$  .001 in 12" // .002 in 12"  $\square$  .001 in 12"
2. Deburr and break all sharp edges.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ABBOTT WORKHOLDING PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ABBOTT WORKHOLDING PRODUCTS IS PROHIBITED.

**Includes NR16TP Top Plate And (2) Lifting Rings Installed**

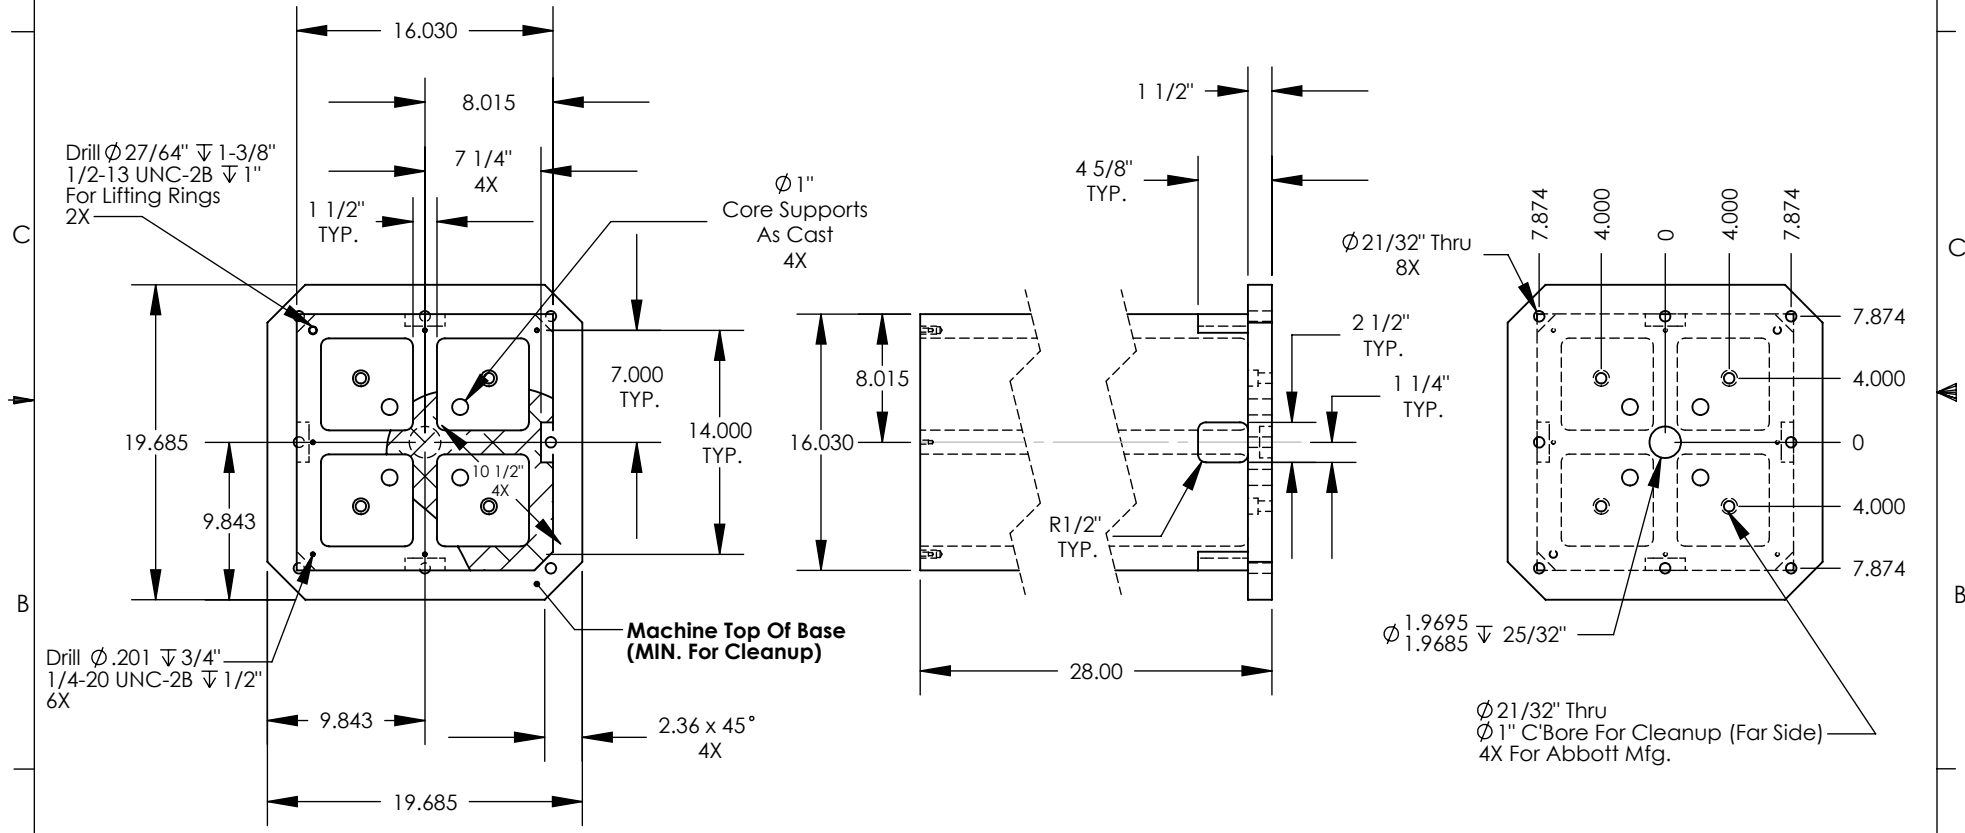

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
$\pm 1/32$	.XX $\pm$ .015	$\pm 5^\circ$
	.XXX $\pm$ .005	
	.XXXX $\pm$ .0005	

DRAWN	DATE				
ZGG	04/29/20				
MATERIAL	WEIGHT (POUNDS)				
713	392.7				
STYLE	DISPOSITION	CUSTOMER:	SIZE	Part Name	REV.
TC	Released	Stock	A	NR1628-500DIN	--

**Abbott Workholding Products**

430 McCall Road  
 Manhattan, KS 66502  
 785-776-8555  
 785-587-0004 Fax  
 800-528-6459  
 www.abbottworkholding.com  
 engineering@abbottworkholding.com